


# GEÏSOLEERDE REDUCTIE

## Omschrijving

MIR15: Geïsoleerd reductie vrouwelijk / mannelijk

### Materiaal

Verzinkt plaatstaal  
Onbrandbare minerale wol  
EPDM rubberen afdichting

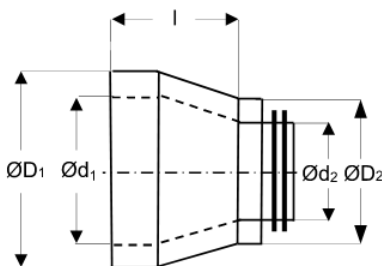

### Dimensies

Ød1

100 tot 250 mm

Ød <sub>1</sub> (mm)	ØD <sub>1</sub> (mm)	Ød <sub>2</sub> (mm)	ØD <sub>2</sub> (mm)	l (mm)	Gewicht (kg)
100	132	80	112	68	0,4
125	157	80	112	85	0,5
		100	132	75	0,5
160	192	80	112	105	0,6
		100	132	95	0,7
		125	157	80	0,6
180	200	100	132	140	1,1
		125	157	135	1,1
		160	192	75	0,8
200	232	100	132	120	1,0
		125	157	105	0,9
		160	192	85	0,9
		180	200	80	0,9
250	280	100	132	175	1,4
		125	157	160	1,6
		160	192	145	1,6
		200	232	120	1,8

